




4.0 & 6.0 LITER COFFEE BREWING SYSTEM

CBS-1130 / 1150 EXTRACTOR® V+™ SERIES



CBS-1131 V+
Single Station Coffee Brewer*



CBS-1132 V+
Twin Station Coffee Brewer*

The new Extractor® V+™ offers tremendous operator value at a competitive price. Equipped with the basic Extractor® features such as pulse brewing and the exclusive Cascading Spray Dome™, this coffee brewer produces a steady stream of hot, delicious coffee from the manufacturers of high-quality coffee equipment for over 30 years – FETCO.



CBS-1151 V+
Single Station Coffee Brewer*



CBS-1152 V+
Twin Station Coffee Brewer*

* Dispensers sold separately.

FETCO®
TRUSTED | RELIABLE | QUALITY



CBS-1131/2 & 1151/2 Extractor V+ Coffee Brewers

The Extractor V+ comes standard with the basic features operators need to provide an efficient and reliable coffee service for any daypart.


Extractor V+ Control Panel

- Control all brewing functions and diagnostic tools with the user-friendly digital touchpad. The screen prominently displays messages, numbers and symbols as you interact with the nimble brewer software. Each batch and stop button features a vibrant LED to easily recognize brew status and selection.



Revolutionary Cascading Spray Dome®

Exclusive to FETCO®! This unique, patented feature provides even saturation of the coffee bed for maximum flavor and aroma extraction. It resists lime build up which means fewer service calls and more time producing revenue.

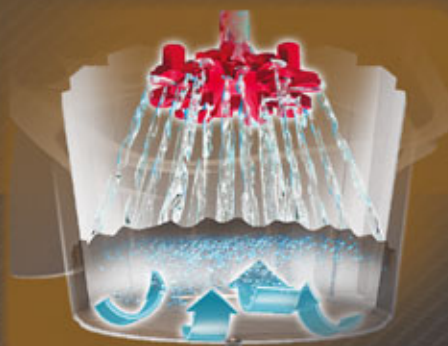

Legendary Extractor® Controls

- The V+ comes standard with programmable extraction controls that are the cornerstone to producing precise volumes of the great-tasting coffee your customers demand. Bypass available on CBS-1150 series at an additional charge. Bypass not available on CBS-1130 series.





Efficient Design & Construction

- ▼ FETCO equipment is designed and built to standards well above most others and can deliver significant energy savings when compared to similar competitors' products.



Four Dispenser Types Offer Even More Flexibility

- ▼ Depending on your coffee service needs, choosing the right dispenser is easy with the LUXUS® line of matching Thermal Servers, Dispensers and Airpots. Dispensers sold separately.



Common Internal Parts

- ▼ Keep inventory and service costs down with interchangeable parts on the XT5™ systems and other V+ models.





Water Specification

Water Inlet 3/8" Male Flare Fitting	Minimum Flow Rate 2 gpm [7.6 lpm]	Water Pressure 20-75 psig [138-517 kPa]
---	---	---

VERY IMPORTANT! To help prevent mechanical issues and extend the life of your equipment, connect to a proper water filtration system.



Electrical Configuration

Configuration Code	Heater Config.	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter]/Hour
USA & CANADA								
E113153 ⁽¹⁾	1 x 1.5 kW	100-120	1	2+G	1.6	NEMA 5-15P ⁽²⁾	13.0	3.9 [14.8] ⁽³⁾
E113151 ⁽¹⁾	1 x 2.3 kW	100-120	1	2+G	2.4	NEMA 5-20P ⁽²⁾	19.7	5.8 [22.0] ⁽³⁾
E113157 ⁽²⁾	1 x 3.0 kW	200-240	1	2+G	3.1	NEMA 6-15P	13.0	7.7 [29.1] ⁽³⁾
NORTH AMERICA & INTERNATIONAL								
E113155 ⁽¹⁾	1 X 2.3 kW	200-240	1	2+G	2.4	Terminal Block	10.0	5.8 [22.0] ⁽³⁾
E113191 ⁽¹⁾	1 X 3.0 kW	200-240	1	2+G	3.2	Terminal Block	13.0	7.7 [29.1] ⁽³⁾
JAPAN								
E113180 ⁽¹⁾	1 X 2.3 kW	100	1	2+G	1.7	Terminal Block	16.7	3.1 [14.0] ⁽³⁾
E113181 ⁽²⁾	1 X 2.3 kW	200	1	2+G	1.7	Terminal Block	8.3	5.0 [21.0] ⁽³⁾
E113182 ⁽¹⁾	1 X 3.0 kW	200	1	2+G	2.2	Terminal Block	10.8	7.7 [29.1] ⁽³⁾
CE								
E113169 ⁽¹⁾	1 X 2.3 kW	230	2	L / N / PE	2.2	Terminal Block	9.6	5.8 [22.0] ⁽³⁾
E113167 ⁽¹⁾	1 X 3.0 kW	230	2	L / N / PE	2.8	Terminal Block	12.4	7.7 [29.1] ⁽³⁾

(1) Comes standard with plastic brew basket. Metal brew basket available at additional cost.
 (2) Sold with factory cord & plug for 120 Volt configuration.
 (3) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 93°C water. 3.8 liters per batch.

Measurements

- Product Dimensions**
- Height: 70.5 cm
- Width: 29.9 cm
- Depth: 52.1 cm
- Empty / Filled Weight**
- 13.2 kg / 25.0 kg
- Combined Filled Weight**
- 30.0 kg
- BREWER + 1 FILLED D042 DISPENSER
- Hot Water Tank Capacity**
- 13.2 l
- Shipping Weight**
- 18.6 kg
- Shipping Dimensions**
- Height: 76.2 cm
- Width: 43.2 cm
- Depth: 55.9 cm

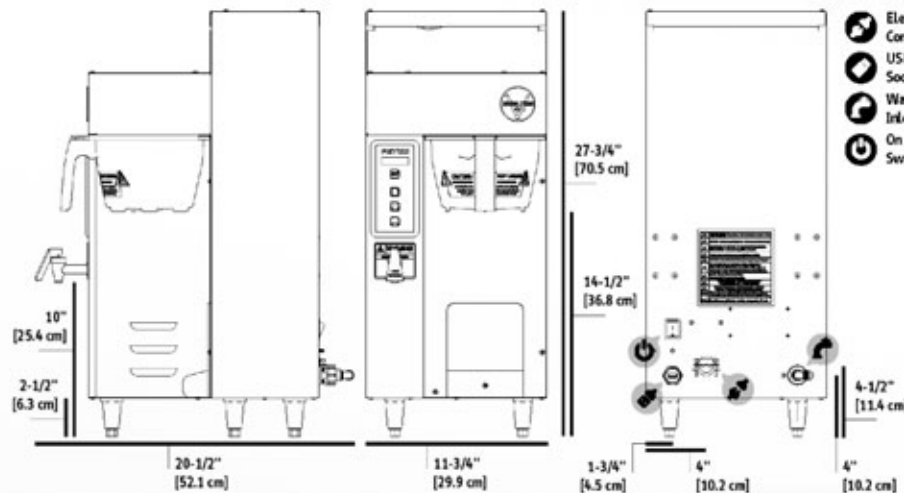

Compatible Dispensers

#D041

3.0L Thermal Pump Lever Airpot



Product Dimensions
 Height: 37.1 cm
 Width: 17.8 cm
 Depth: 22.9 cm

Empty / Filled Weight
 2.1 kg / 5.1 kg

#D063

1.0 Gallon Thermal Pump Lever Airpot



Product Dimensions
 Height: 47.0 cm
 Width: 17.8 cm
 Depth: 22.9 cm

Empty / Filled Weight
 4.1 kg / 6.0 kg

#D451

L4S-10
 1.0 Gallon LUXUS* Thermal Dispenser



Product Dimensions
 Height: 34.2 cm
 Width: 20.3 cm
 Depth: 29.2 cm

Empty / Filled Weight
 2.5 kg / 5.6 kg

* Must be used with S4S Serving Stations.

Serving Stations

#A147

S4S-10-1
 Single Serving Station for L4S-10 Server



#A148

S4S-10-2
 Twin Serving Station for L4S-10 Server



#A149

S4S-10-3
 Triple Serving Station for L4S-10 Server



Paper Filter

#F002

13" x 5.5"
 Standard Paper Coffee Filter



Brew Basket

#B003218B1

13" x 5"
 Stainless Steel Brew Basket



#B014218BN2

13" x 5"
 Plastic Brew Basket w/ Brown Insert



Colored Brew Basket Handle Inserts

Blue:
 1023.00180.00

Green:
 1023.00191.00

Red:
 1023.00190.00

Orange:
 1023.00192.00



Water Specification

Water Inlet 3/8" Male Flare Fitting	Minimum Flow Rate 2 gpm [7.60 lpm]	Water Pressure 20-75 psig, [138-517 kPa]
---	--	--

VERY IMPORTANT! To help prevent mechanical issues and extend the life of your equipment, connect to a proper water filtration system.


Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter]/Hour
USA & CANADA								
E113251 ⁽¹⁾	2 x 2.3 kW	200-240	1	2+G	4.7	Terminal Block	19.7	11.0 [42.0] ⁽²⁾
E113252 ⁽¹⁾	2 x 3.0 kW	200-240	1	2+G	6.1	Terminal Block	25.5	14.3 [54.0] ⁽²⁾
JAPAN								
E113292 ⁽¹⁾	2 X 2.3 kW	200-240	1	2+G	4.7	Terminal Block	19.7	11.0 [42.0] ⁽²⁾
E113291 ⁽¹⁾	2 X 3.0 kW	200-240	1	2+G	6.1	Terminal Block	25.5	14.3 [54.0] ⁽²⁾
CE								
E113262 ⁽¹⁾	2 X 3.0 kW	230/400	2	2L / N / PE	5.6	Terminal Block	12.4	14.9 [56.0] ⁽²⁾
E113264 ⁽¹⁾	2 X 2.3 kW	230/400	2	2L / N / PE	4.3	Terminal Block	9.6	11.0 [42.0] ⁽²⁾
E113266 ⁽¹⁾	2 X 3.0 kW	230	1	L / N / PE	5.6	Terminal Block	24.4	14.3 [54.0] ⁽²⁾
E113268 ⁽¹⁾	2 X 2.3 kW	230	1	L / N / PE	4.3	Terminal Block	18.8	5.8 [22.0] ⁽²⁾

(1) Comes standard with plastic brew basket. Metal brew basket available at additional cost.
 (2) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 93°C water. 3.8 liters per batch.

Measurements

- Product Dimensions**
Height: 70.5 cm
Width: 50.2 cm
Depth: 52.1 cm
- Empty / Filled Weight**
21.3 kg / 41.7 kg
- Combined Filled Weight**
51.9 kg
BREWERS: * 2 FILLED D063 DISPENSERS
- Hot Water Tank Capacity**
24.0 l
- Shipping Weight**
25.0 kg
- Shipping Dimensions**
Height: 76.2 cm
Width: 58.4 cm
Depth: 63.5 cm

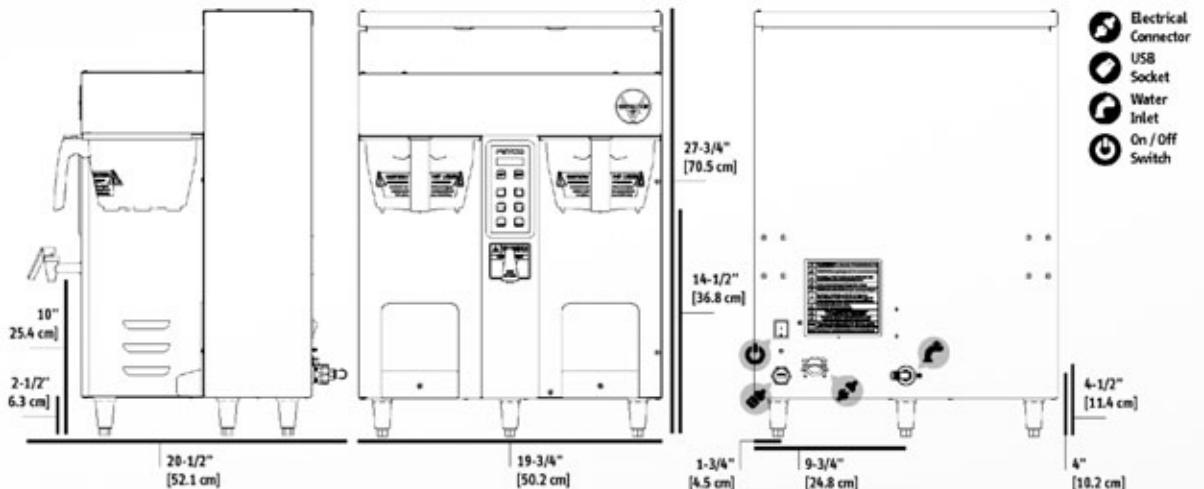

Compatible Dispensers

#D041

3.0L Thermal Pump Lever Airpot



Product Dimensions
Height: 37.1 cm
Width: 17.8 cm
Depth: 22.9 cm

Empty / Filled Weight
2.1 kg / 5.1 kg

#D063

1.0 Gallon Thermal Pump Lever Airpot



Product Dimensions
Height: 47.0 cm
Width: 17.8 cm
Depth: 22.9 cm

Empty / Filled Weight
4.1 kg / 6.0 kg

#D451

L4S-10
1.0 Gallon LUXUS* Thermal Dispenser



Product Dimensions
Height: 34.2 cm
Width: 20.3 cm
Depth: 29.2 cm

Empty / Filled Weight
2.5 kg / 5.6 kg

* Must be used with S4S Serving Stations.

Serving Stations

#A147

S4S-10-1
Single Serving Station for L4S-10 Server



#A148

S4S-10-2
Twin Serving Station for L4S-10 Server



#A149

S4S-10-3
Triple Serving Station for L4S-10 Server



Paper Filter

#F002

13" x 5.5"
Standard Paper Coffee Filter



Brew Basket

#B003218B1

13" x 5"
Stainless Steel Brew Basket



#B014218BN2

13" x 5"
Plastic Brew Basket w/ Brown Insert



Colored Brew Basket Handle Inserts

Blue:
1023.00180.00

Green:
1023.00191.00

Red:
1023.00190.00

Orange:
1023.00192.00



MANUFACTURED IN THE USA



Water Specification

Water Inlet 3/8" Male Flare Fitting	Minimum Flow Rate 1 1/2 gpm [5.7 lpm]	Water Pressure 20-75 psig [138-517 kPa]
---	---	---

VERY IMPORTANT! To help prevent mechanical issues and extend the life of your equipment, connect to a proper water filtration system.

Electrical Configuration

Configuration Code	Heater Conf.	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter]/Hour
NORTH AMERICA								
E115151 ⁽¹⁾	2 x 3.0 kW	208-240	1	2+G	4.6-6.1	Terminal Block	22.4-25.8	15.3 [58.0] ⁽²⁾
INTERNATIONAL								
E115190 ⁽¹⁾	1 x 4.0 kW	200-240	1	2+G	4.1	Terminal Block	14.2-17.1	9.3 [35.0] ⁽²⁾
E115191 ⁽¹⁾	1 x 5.0 kW	200-240	1	2+G	5.1	Terminal Block	17.7-21.3	12.7 [48.0] ⁽²⁾
E115192 ⁽¹⁾	2 x 3.0 kW	200-240	1	2+G	6.1	Terminal Block	21.3-25.5	15.3 [58.0] ⁽²⁾
E115193 ⁽¹⁾	2 x 2.3 kW	200-240	1	2+G	4.7-6.1	Terminal Block	22.1-25.5	14.0 [53.0] ⁽²⁾
JAPAN								
E115180 ⁽¹⁾	1 x 5.0 kW	200-240	1	2+G	3.6	Terminal Block	17.7	11.6 [44.0] ⁽²⁾
CE								
E115162 ⁽¹⁾	2 x 2.3 kW	230/400	2	2L / N / PE	5.6	Terminal Block	12.4	14.0 [53.0] ⁽²⁾
E115161 ⁽¹⁾	2 x 3.0 kW	230/400	2	2L / N / PE	6.1	Terminal Block	21.3-25.5	15.3 [58.0] ⁽²⁾

(1) Coffee brewer comes standard with plastic brew baskets. Metal brew baskets and bypass option available at an additional charge.

(2) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 93°C water; 6 liters per batch.

Measurements

Product Dimensions
Height: 94.0 cm
Width: 32.4 cm
Depth: 57.7 cm


Empty / Filled Weight
24.0 kg / 48.0 kg

Combined Filled Weight
59.0 kg
BREWER + 1 FILLED L4D-15 DISPENSER

Hot Water Tank Capacity
24.0 l

Shipping Weight
26.0 kg

Shipping Dimensions
Height: 94.0 cm
Width: 45.7 cm
Depth: 61.0 cm

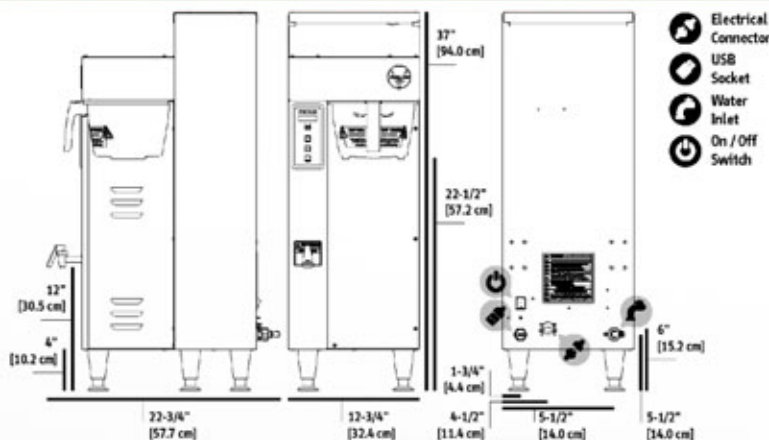

Compatible Dispensers

#D009
TPD-15
1.5 Gallon LUXUS®
Portable Thermal
Dispenser



Product Dimensions
Height: 61.3 cm
Width: 23.7 cm
Depth: 22.9 cm

Empty / Filled Weight
5.8 kg / 11.2 kg

#D449
L4D-15
1.5 Gallon LUXUS®
Thermal Dispenser



Product Dimensions
Height: 58.4 cm
Width: 22.9 cm
Depth: 33.6 cm

Empty / Filled Weight
4.8 kg / 10.2 kg

#D452
L4S-15
1.5 Gallon LUXUS®
Thermal Server®



Product Dimensions
Height: 37.4 cm
Width: 22.9 cm
Depth: 31.7 cm

Empty / Filled Weight
3.3 kg / 8.0 kg

Serving Stations

#A150
S4S-15-1
Single Serving Station
for L4S-15 Servers



#A151
S4S-15-2
Twin Serving Station
for L4S-15 Servers



#A152
S4S-15-3
Triple Serving Station
for L4S-15 Servers



Paper Filter

#F001
15" x 5.5"
Standard Paper
Coffee Filter



Brew Basket



#B001280B1
16" x 6"
Stainless Steel
Brew Basket



#B015280BN2
16" x 6"
Plastic Brew Basket
w/ Brown Insert



Colored Brew Basket Handle Inserts





Water Specification

Water Inlet 3/8" Male Flare Fitting	Minimum Flow Rate 1 1/2 gpm [5.7 lpm]	Water Pressure 20-75 psig, [138-517 kPa]
---	---	--

VERY IMPORTANT! To help prevent mechanical issues and extend the life of your equipment, connect to a proper water filtration system.

Electrical Configuration

Configuration Code	Heater Conf.	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter]/Hour
NORTH AMERICA								
E115251⁽¹⁾	2 x 3.0 kW	208-240	1	2+G	4.6-6.1	Terminal Block	22.4-25.8	15.3 [58.0] ⁽²⁾
	3 x 3.0 kW	208-240	3	3+G	6.9-9.1	Terminal Block	19.5-22.5	22.5 [85.0] ⁽²⁾
E115252⁽¹⁾	2 x 5.0 kW	208-240	1	2+G	7.6-10.1	Terminal Block	36.9-42.5	25.3 [97.0] ⁽²⁾
	3 x 5.0 kW	208-240	3	3+G	11.4-15.1	Terminal Block	32.0-36.9	38.3 [145.0] ⁽²⁾
INTERNATIONAL								
E115292⁽¹⁾	2 x 3.0 kW	208-240	1	2+G	4.6-6.1	Terminal Block	22.4-25.8	15.3 [58.0] ⁽²⁾
E115294⁽¹⁾	2 x 5.0 kW	208-240	1	2+G	7.6-10.1	Terminal Block	36.9-42.5	25.3 [97.0] ⁽²⁾
E115296⁽¹⁾	3 x 4.0 kW	240/415	3	4+G	12.2	Terminal Block	15.7-17.1	29.5 [112.0] ⁽²⁾
E115290⁽¹⁾	3 x 3.0 kW	220/380 or 240/415	3	4+G	9.1	Terminal Block	11.8-12.9	22.5 [85.0] ⁽²⁾
E115291⁽¹⁾	3 x 5.0 kW	220/380 or 240/415	3	4+G	15.1	Terminal Block	19.5-21.4	38.3 [145.0] ⁽²⁾
JAPAN								
E115280⁽¹⁾	3 x 3.0 kW	200	3	3+G	6.5	Terminal Block	18.6	17.0 [64.0] ⁽²⁾
CE								
E115261⁽¹⁾	3 x 3.0 kW	230/400	3	3L / N / PE	8.6	Terminal Block	12.4	22.5 [85.0] ⁽²⁾
E115262⁽¹⁾	3 x 5.0 kW	230/400	3	3L / N / PE	14.1	Terminal Block	20.4	38.3 [145.0] ⁽²⁾

(1) Coffee brewer comes standard with plastic brew baskets. Metal brew baskets and bypass option available at an additional charge.

(2) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 93°C water. 6 liters per batch.

Measurements

Product Dimensions
Height: 94.0 cm
Width: 53.3 cm
Depth: 57.7 cm


Empty / Filled Weight
35.0 kg / 78.0 kg

Combined Filled Weight
99.0 kg
BREWER + 2 FILLED L4D-15 DISPENSERS

Hot Water Tank Capacity
44.0 l

Shipping Weight
44.0 kg

Shipping Dimensions
Height: 94.0 cm
Width: 61.0 cm
Depth: 68.6 cm

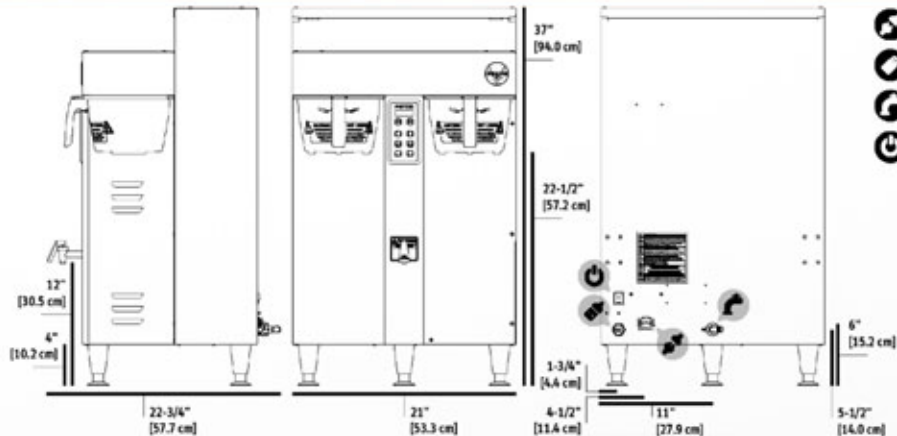

- Electrical Connector
- USB Socket
- Water Inlet
- On / Off Switch

Compatible Dispensers

#D009
TPD-15
1.5 Gallon LUXUS®
Portable Thermal
Dispenser



Product Dimensions
Height: 61.3 cm
Width: 23.7 cm
Depth: 22.9 cm

Empty / Filled Weight
5.8 kg / 11.2 kg

#D449
L4D-15
1.5 Gallon LUXUS®
Thermal Dispenser



Product Dimensions
Height: 58.4 cm
Width: 22.9 cm
Depth: 33.6 cm

Empty / Filled Weight
4.8 kg / 10.2 kg

#D452
L4S-15
1.5 Gallon LUXUS®
Thermal Server*



Product Dimensions
Height: 37.4 cm
Width: 22.9 cm
Depth: 31.7 cm

Empty / Filled Weight
3.3 kg / 8.0 kg

Serving Stations

#A150
S4S-15-1
Single Serving Station
for L4S-15 Servers



#A151
S4S-15-2
Twin Serving Station
for L4S-15 Servers



#A152
S4S-15-3
Triple Serving Station
for L4S-15 Servers



Paper Filter

#F001
15" x 5.5"
Standard Paper
Coffee Filter



Brew Basket

#B001280B1
16" x 6"
Stainless Steel
Brew Basket



#B015280BN2
16" x 6"
Plastic Brew Basket
w/ Brown Insert



Colored Brew Basket Handle Inserts



Blue:
1023.00180.00



Red:
1023.00190.00



Green:
1023.00191.00




Orange:
1023.00192.00



MANUFACTURED IN THE USA

Exterior Features & Benefits

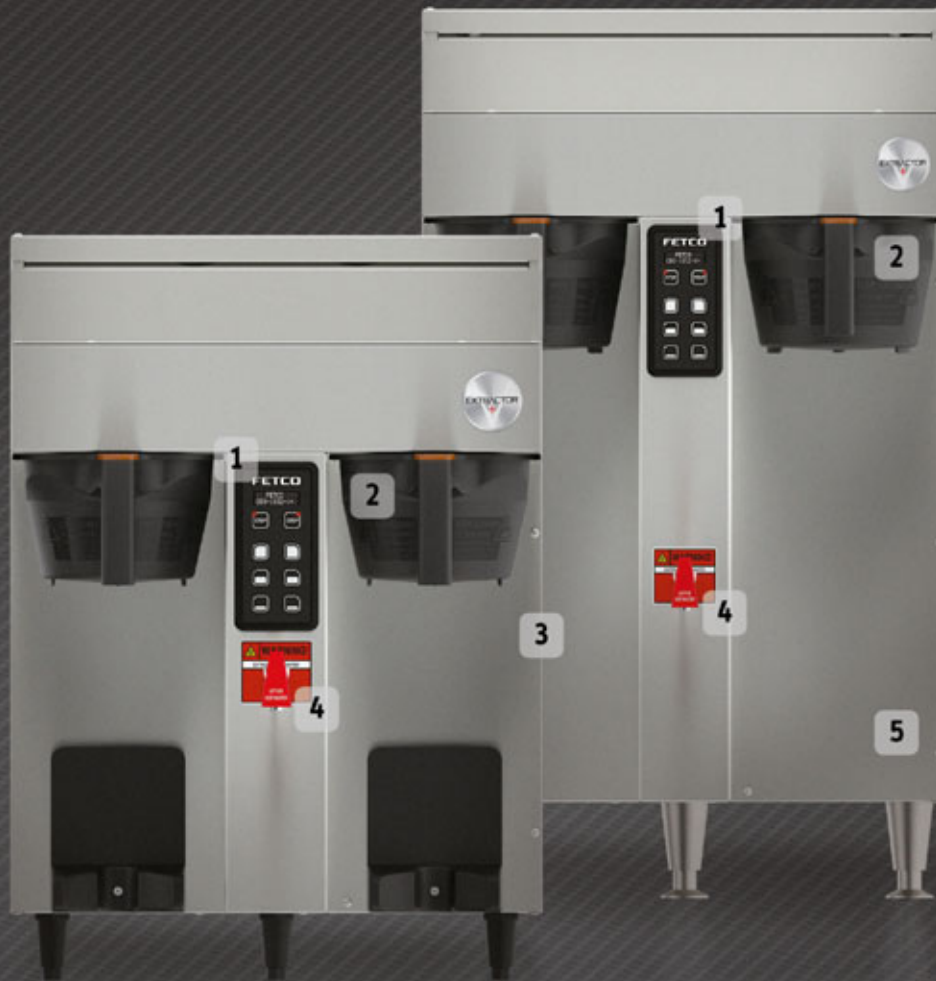

Feature	Benefit
1 > Touchpad Controls	Touchpad with bright LEDs for easy programming and batch identification.
2 > Durable Brew Basket	Durable plastic construction with removable color ID insert and built-in counter stand for easy brew prep.
3 > Mixed Material Construction	Mixed material is attractive and comfortable in any front-of-house setting.
4 > Manual Water Faucet	Safely dispenses hot water away from steam and brew basket.
5 > Stainless Steel Finish	Withstands the harshest foodservice environments and is durable and easy to clean.


Dispensers sold separately.

FETCO

© Copyright 2017 FETCO® is a mark of Food Equipment Technologies Company.

#BR14134 R.1

 fetco.com

 international@fetco.com

 847.719.3000

 847.719.3001

 Food Equipment Technologies Co.
600 Rose Road
Lake Zurich, IL 60047
USA